


Galvanised Movement Bead

Product description/ specification:

This product is designed to be used to form movement joints in plaster or to render where there is a need to allow differential or thermal movement. The bead consists of two plaster stop lengths joined by a white pvc extrusion which allows for up to 4mm of movement and which is covered by a vinyl tape which is removed after plastering or rendering. Usually used internally, the Stainless Steel alternative is recommended for external use.


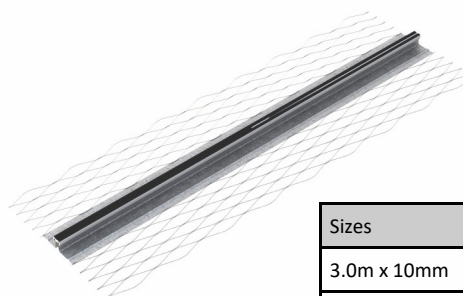


Sizes	Per box
3.0m x 10mm	10 lengths
3.0m x 13mm	10 lengths
3.0m x 16mm	10 lengths
3.0m x 19mm	10 lengths

Stainless Steel Movement Bead

Product description/ specification:

This product is designed to be used to form movement joints in plaster or render where there is a need to allow for differential or thermal movement. The bead consists of two plaster stop lengths joined by a white pvc extrusion which allows for up to 4mm of movement and which is covered by a vinyl tape which is removed after plastering or rendering. External use recommended.

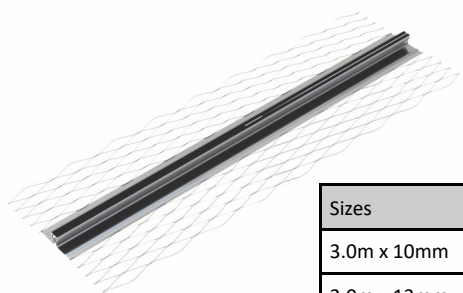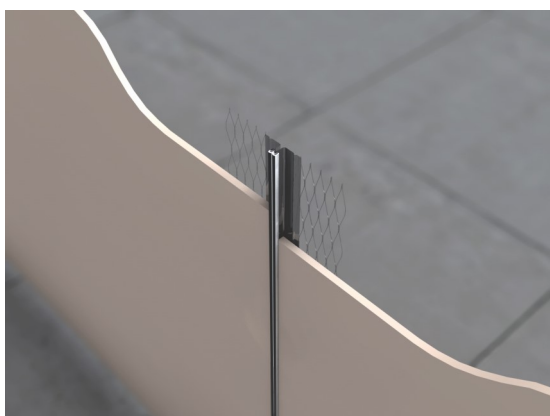

Sizes	Per box
3.0m x 10mm	10 lengths
3.0m x 13mm	10 lengths
3.0m x 16mm	10 lengths
3.0m x 19mm	10 lengths