

# **General Purpose Wall Tie**

## **Masonry to Masonry Wall Ties**

These products act to secure two leaves of a cavity wall to each other, allowing them to act as one structurally. A cavity tie usually incorporates some mechanism, (usually a change of shape) to discourage moisture moving across the tie. Most cavity ties are available with a dedicated clip to secure insulation (usually in sheet form) within the cavity.

### Product

#### **General Purpose Wall Tie**

Multidrip feature to prevent moisture travelling across the cavity. The design means that the tie can be installed either way up.


Tested as Type B (sound)

Tested as Type 2 (strength) to BS EN 845-1.

Size: 275mm

### Performance

General Purpose Wall Tie	
Tension Capacity	2200N
Compression Capacity	1410N
Minimum Embedment	62.5mm
Minimum Mortar Joint	10mm

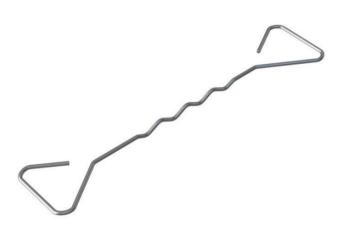



#### Safety Precautions

General Purpose Wall Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

### **BS** Fixings

#### **BS** Fixings

BS Stainless Limited 360 Leach Place, Walton Summit Bamber Bridge, Lancashire PR5 8AS, United Kingdom Tel: +44 (0) 3330 117818 Fax: +44 (0) 1772 313010 info@bsfixings.co.uk www.bsfixings.co.uk