


## Stainless Steel Cavity Starter Ties

Stainless Steel Starter Tie supplied complete with nylon plug. These ties are used when new walls are being built directly from existing brickwork. Alternatively they can be used without the plug and screwed directly into timber door or window frames.

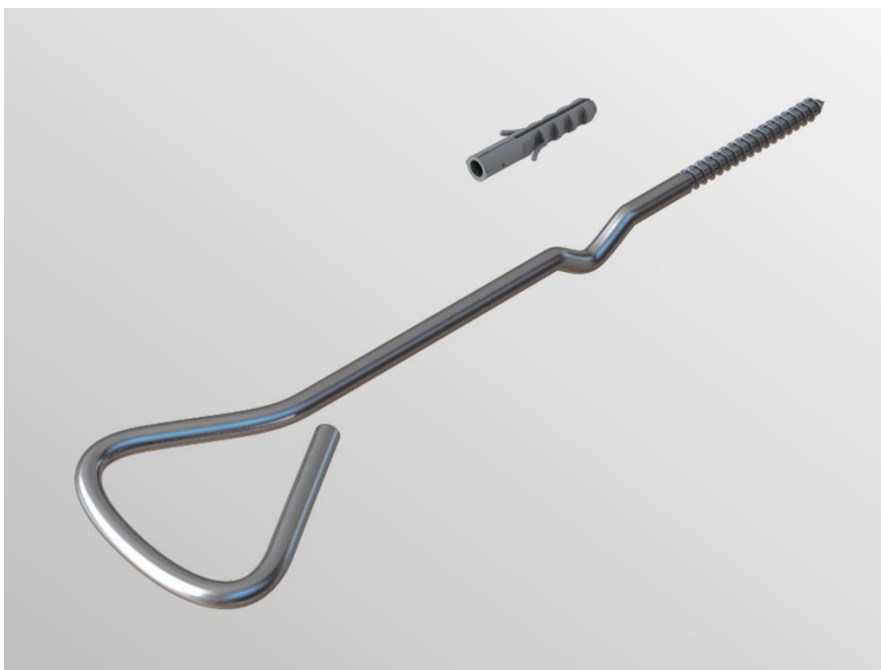

Compressive Load Capacity	2260n
Tension Load Capacity at Mortar End	2276n
Tension Load Capacity at Threaded End	2050n
Minimum Embedment	62.5mm
Minimum Mortar Joint	10mm

Stainless Steel Cavity Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable PPE should always be used when handling/installing these products.