


Frame Cramp wall tie with drip

These products allow masonry walls to be restrained back to other elements of the structure. This could be pre-existing walls, or new or pre-existing steel work. The ties, once in position, prevent sideways movement between a wall and another structure.

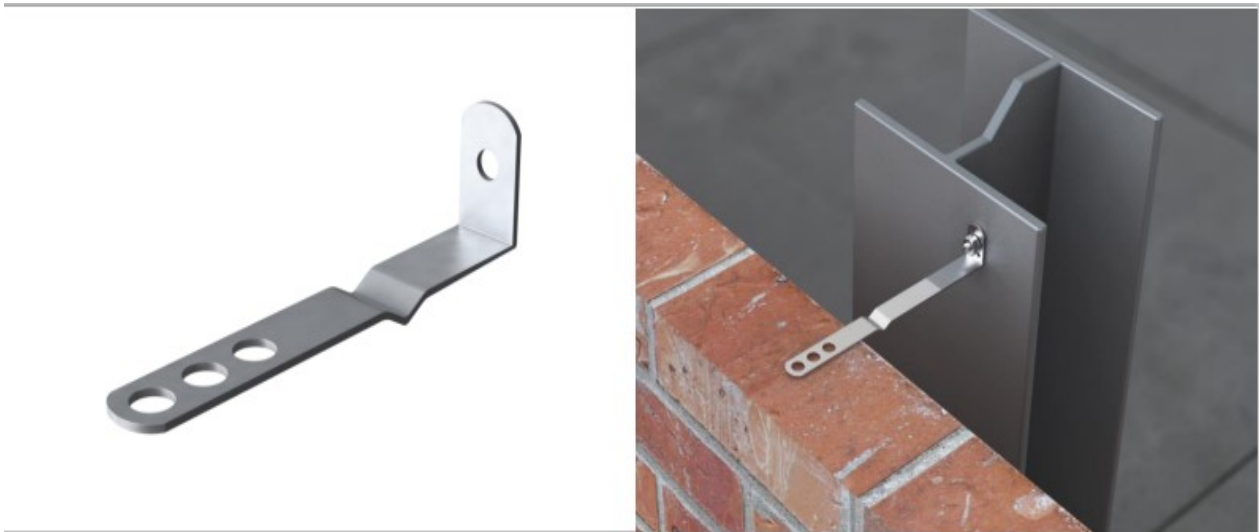

Product

Frame Cramp supplied with a drip to prevent moisture crossing the cavity.
Drip position 90mm from safety end as standard.

Sizes:

125mm	225mm
150mm	250mm
175mm	275mm
200mm	300mm

Performance

125mm-200mm	
Compressive Load Capacity	1770N
Tensile Load @ Capacity	1320N
Minimum Embedment	62.5mm
Minimum Mortar Joint	10mm

225mm-300mm	
Compressive Load Capacity	1470N
Tensile Load @ Capacity	1320N
Minimum Embedment	62.5mm
Minimum Mortar Joint	10mm