

## Self - Drilling Screw

### Product Description/ Specification

BS Stainless supply a wide range of stainless steel screws, including self drilling screws. Products are sourced around the world from suppliers who meet the group's stringent quality standards. In addition to the standard sizes listed below, we can also source additional type and sizes of screws.

The screws are manufactured in stainless steel 304, 316 and 410. Other materials may be supplied if requested.


Austenitic Stainless Steel ASTM A240/ ASTM A167/ EN 10088-4

The screws can be supplied with either bonded EPDM / Stainless steel washers or polyamide washers.

#### Dimensions:

#### Silver Coating:

The silver coating provides optimum sealing with multifunctional properties which guarantees excellent corrosion protection and simultaneously reduce the screw-in resistance. It is free from harmful heavy metals such as Cr - (VI)

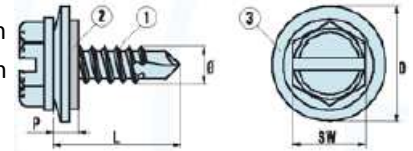






Ø 4,2 mm

SW = 7 mm

P = 2,0 mm

D = 10,0 mm



 A2/A4	 Stahl Steel Acier		Lg min		
2 x 0,8 mm	max. 3,0 mm	4,2 x 13 mm	3,3 mm	7 mm	1000
2 x 0,8 mm	max. 3,0 mm	4,2 x 16 mm	6,3 mm	7 mm	500
2 x 08 mm	max. 3,0 mm	4,2 x 19 mm	9,3 mm	7 mm	500






Ø 4,8 mm

SW = 8 mm

P = 2,0 mm

D = 10,0 mm



 A2/A4	 Stahl Steel Acier		Lg min		
2 x 1,0 mm	max. 4,0 mm	4,8 x 16 mm	4,8 mm	8 mm	500
2 x 1,0 mm	max. 4,0 mm	4,8 x 19 mm	7,7 mm	8 mm	500
2 x 1,0 mm	max. 4,0 mm	4,8 x 25 mm	13,7 mm	8 mm	500

#### Safety:

There are no known health risks in handling the screws, although it is recommended that gloves should be worn while handling.



2731

ISO 9001: 2008